





ML-150
1.5" MECHANICAL LOCK

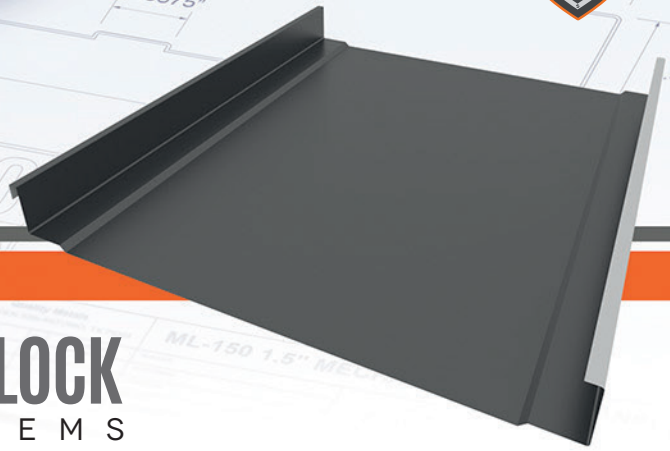

ML-150 1.5" MECHANICAL LOCK

STANDING SEAM SYSTEMS



The **ML-150** Mechanical Lock (1.5" High Standing Seam) features structural performance as well as architectural aesthetics. **ML-150** Panels can be factory formed and/or fabricated, for all substrates, at project locations. Utilizes concealed fasteners with a fixed and/or floating clip system. The floating clip system reduces the effects of thermal stresses on the panels helping to maintain a beautifully smooth, and uniform appearance, despite fluctuations in temperature.


ML-150 Mechanical Lock Panel is a mechanically seamed, vertical leg, standing seam roof system that combines a 1.5 inch tall slim rib with exceptional uplift resistance. **ML-150** Panels are designed to withstand the most rigorous weather conditions. The **ML-150** Panel is available in a 16-inch width and allows for the installation directly over purlins and bar joists.

Features


- 24 GA steel
- Colors available on standard, premium and metallic.
- Coverage 16".
- On site factory made.
- Available in smooth, striated and stiffener ribs.
- UL Construction Numbers: TGKX5549.
- Uplift resistance of prepared roof-covering materials is UL2218 Class 90.
- Impact resistance of prepared roof-covering materials UL2218 Class 4.
- Fire tests of roof coverings UL790. External fire exposure.
- TDI Texas approved.

Product Specifications


- **Applications:** Roof
- **Coverage Widths:** 16"
- **Minimum Slope:** 1/2:12
- **Panel Attachment:** Standing Seam System, Clip (fixed or floating).
- **Gauges:** 24 (standard); 22 and 26 (optional)
- **Finishes:** Smooth, Striated and Stiffener Ribs.
- **Coatings:** Galvalume®, Durapon 70®, Ceranamel®.

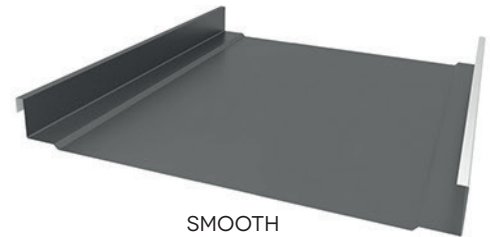

SMOOTH

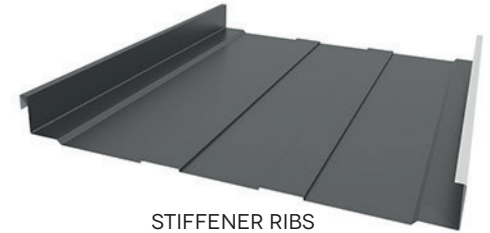

STIFFENER RIBS

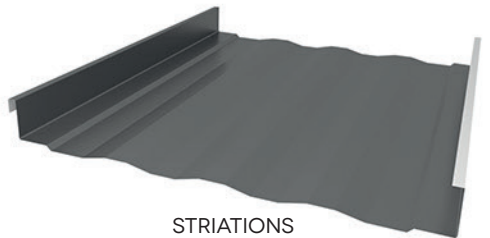


STRIATIONS



QUALITY METALS © ALL RIGHTS RESERVED 2018



San Antonio • 2707 Castroville Rd • San Antonio, TX 78237 • (210) 227-7276 • Fax (210) 227-0329
McAllen • 2221 Austin Ave • McAllen, TX 78501 • (956) 627-2966 • Fax (956) 627-0918
Dallas • 2515 Willowbrook Rd 100 • Dallas, TX 75220 • (972) 331 6800 • Fax (972) 331 6803
Houston • 6460 Langfield Road • Houston, TX 77092 • (713) 944-4480 • Fax (713) 944-4430

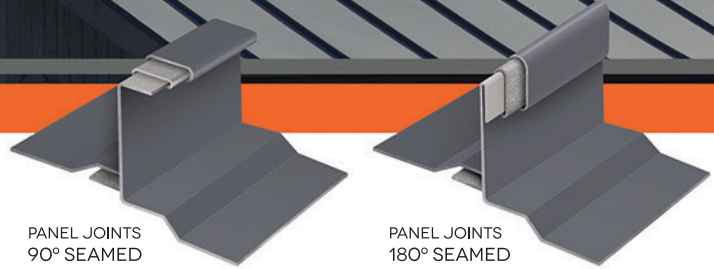

PANEL JOINTS
90° SEAMED

PANEL JOINTS
180° SEAMED


ML-150

1.5" MECHANICAL LOCK



AIA

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
ENVIRONMENTAL	Impact Resistance	UL 2218	Determines Impact Resistance of prepared Roof Covering Materials	CLASS 4 RATING
FIRE RESISTANCE	Room Fire Performance	UL 790	Standard for Standard Test Methods for Fire Tests of Roof Coverings	CLASS A FIRE RATING
	Room Fire Performance	UL 263	Standard for Standard Test Methods for Fire Tests of Roof Coverings	For use in Design Nos. TGKX554

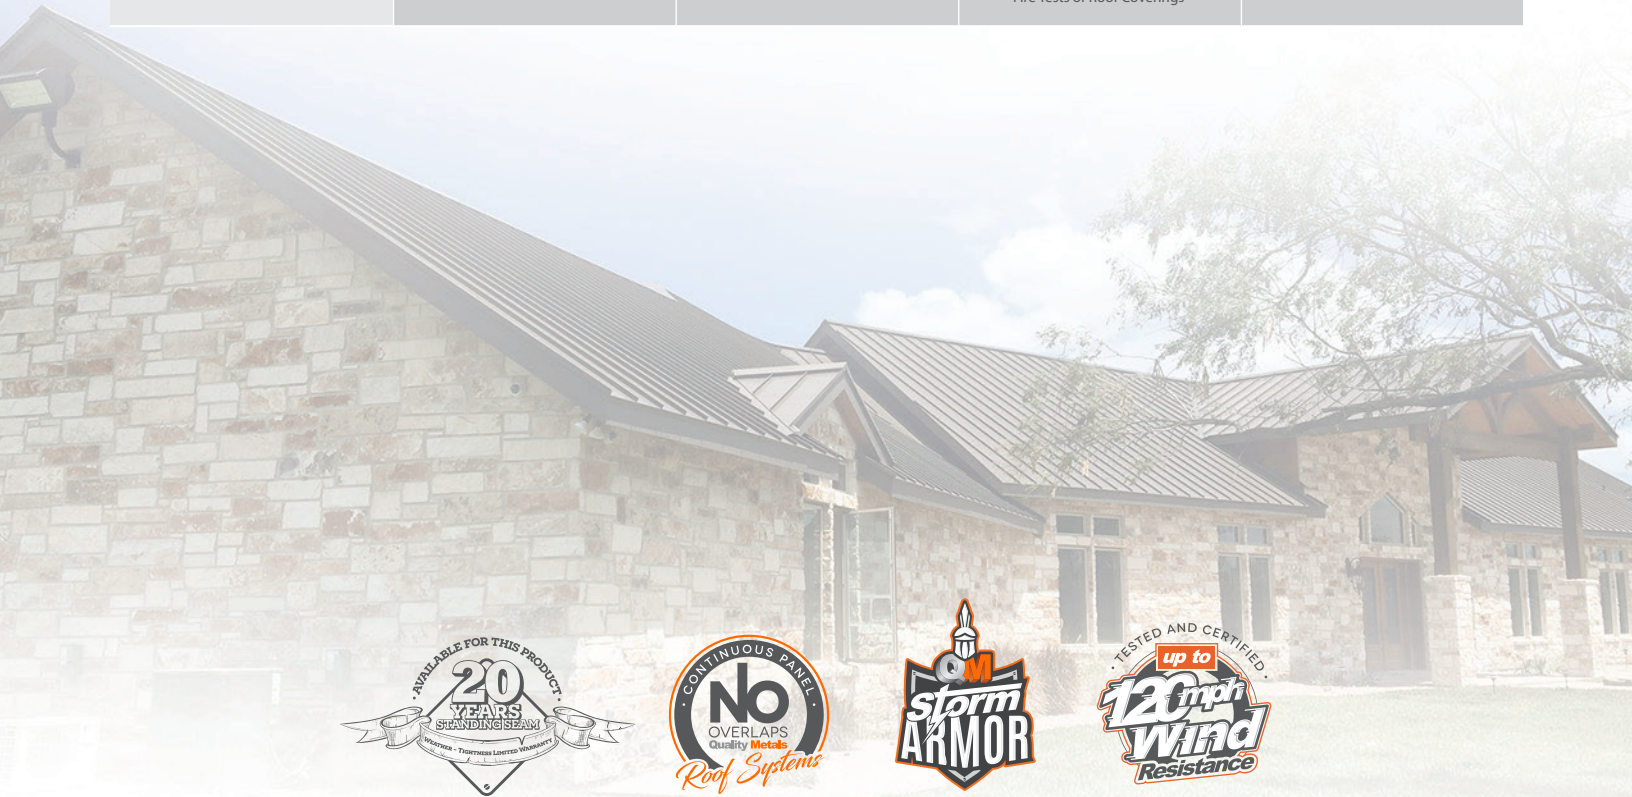

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, Quality Metals reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at www.saqualitymetals.com. Application details are for illustration purposes only and may not be appropriate for all environmental conditions, building designs or panel profiles. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. If there is a conflict between this manual and project erection drawings, the erection drawings will take precedence.

QUALITY METALS © ALL RIGHTS RESERVED 2018



San Antonio • 2707 Castroville Rd • San Antonio, TX 78237 • (210) 227-7276 • Fax (210) 227-0329
McAllen • 2221 Austin Ave • McAllen, TX 78501 • (956) 627-2966 • Fax (956) 627-0918
Dallas • 2515 Willowbrook Rd 100 • Dallas, TX 75220 • (972) 331 6800 • Fax (972) 331 6803
Houston • 6460 Langfield Road • Houston, TX 77092 • (713) 944-4480 • Fax (713) 944-4430