




**CONCEALED  
FASTENER**  
ROOF AND WALL  
SYSTEMS



**SL-150**  
SNAP LOCK

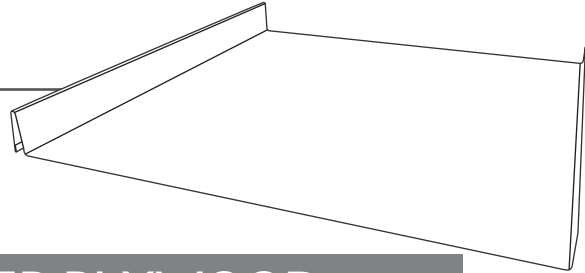

## LOAD TABLE OVER PLYWOOD

16" PANEL WIDE 24 GA PANEL OVER PLYWOOD MIN 5/8"							
ZONE	CLIP	SUBSTRATE	WIND SPEED ZONE				
			140	150	160	170	180
			ON CENTER SPACING	ON CENTER SPACING	ON CENTER SPACING	ON CENTER SPACING	ON CENTER SPACING
1	FIXED	PLYWOOD	24"	24"	24"	24"	24"
2	FIXED	PLYWOOD	24"	24"	24"	24"	24"
3	FIXED	PLYWOOD	12"	12"	12"	6"	6"

**Notes:**

1. Panel Fastener: (2) #12-11 x 1" Type A pancake head per clip.
2. Panel Clip: SL-150 Fixed Clip.
3. Maximum Allowable Panel Uplift Resistance: 86.0 @ 24 o.c., 108.5 PSf @ 12" o.c. pressure based on UL/580/UL 1897.
4. Plywood decking: Min. 5/8"
5. Load table based on wind pressures calculated per ascent 7-10 (kd=0.85) multiplied by 0.6 per FBC 2010 Section 1609 1.5.
6. Load table does not include overhang zones.